


34+C, I PREMIUM

SELF-ADHESIVE ROOF COVERING (POLYESTER)
OSB 15MM,
BUILT , UP ROOFING 50X25MM,
VENTILATED CAVITY BETWEEN JOISTS 25MM,
BREATHER MEMBRANE,
ROOF RAFTERS 45X145MM,
ISOLATION, $\lambda = 0.035W/(M/K)$, 150MM,
VAPOR BARRIER,
TONGUE AND GROOVE ROOFBOARDS 19/20MM.

OUTSIDE
-
U - Wert: 0,25 W/(m²K)

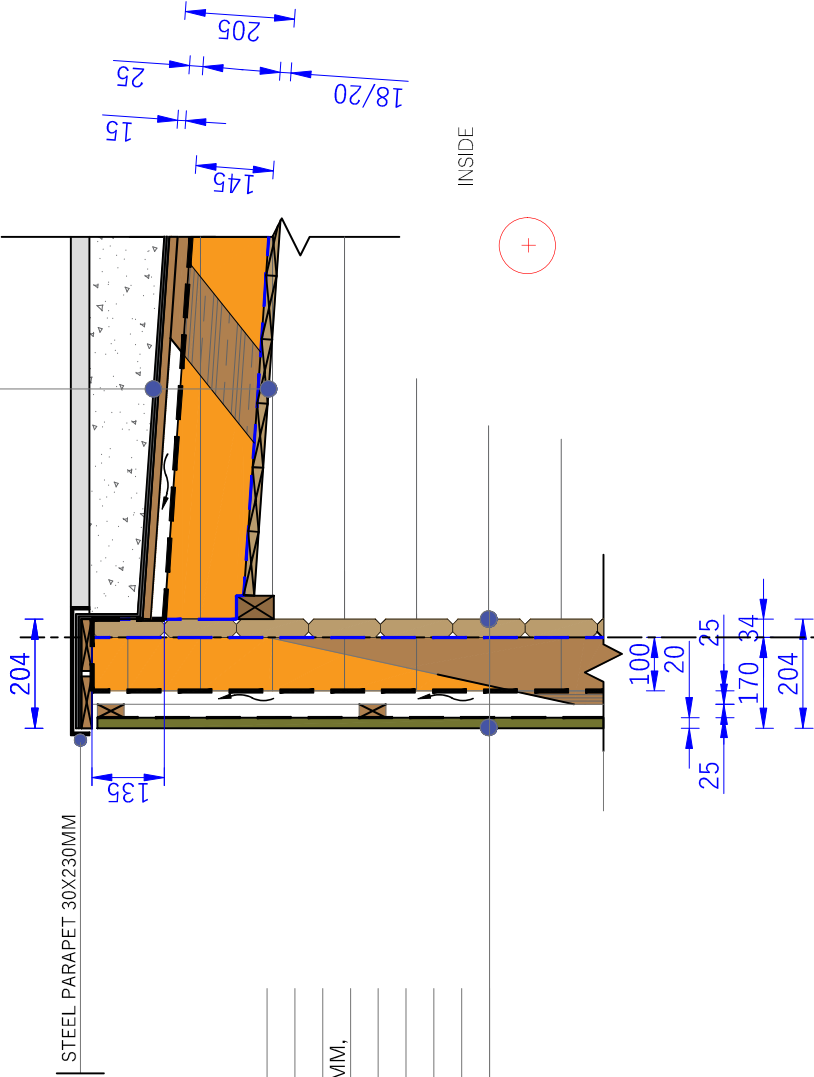

OUTSIDE
-
U - Wert: 0,32 W/(m²K)

	Projekt Nr.	Nutzfläche		Wandstärke		-	Papierformat / Maßstab	A3 / 1:10
	-	Bebaute fläche		Gebäudehöhe		min	1 cm - 0.50 meter 0 1.00 m 2.00 m 3.00 m	
	-	Dachneigung				max		
	Bauherr	Dachfläche		DETAIL NR. 1		▲		
	Entwurfsverfasser	Bezeichnung				-		