



FOR CONTINUATION REFER TO DRAWING
2775-LLA-ZZ-ZZ-DR-L-0101

FOR CONTINUATION REFER TO DRAWING
2775-LLA-ZZ-ZZ-DR-L-0103

LEGEND

- Site application boundary**
- Surfacing**
- S1 Proposed macadam roads and pavements
 - S2 Proposed Europa block paving by Charcon; 200x100mm; 80mm thickness; colour - Grey; herringbone; or similar approved
 - S3 Proposed Europa block paving by Charcon; 200x100mm; 80mm thickness; colour - Buff; herringbone; or similar approved
 - S4 Proposed Europa block paving by Charcon; 200x100mm; 80mm thickness; colour - Autumn; herringbone; or similar approved
 - S5 Proposed Moordale flag paving by Charcon; 450x450x40mm; colour - Natural; stack bond; or similar approved
 - S6 Proposed Country Setts to entry ramps; 220x100x100mm; or similar approved
 - S7 Proposed resin bound gravel to cycle track; buff colour; or similar approved
 - S8 Proposed hogg'n path to POS; or similar approved
 - S9 Proposed crushed shingle; 20mm particle size; or similar approved
 - (P) Areas of permeable surfacing:
 - Permeable asphalt to be implemented for areas of permeable macadam roads
 - Europa Infitra range to be implemented for areas of permeable block paving
- Boundary Treatments**
- W1 Proposed wall; to architects details
 - B1 Proposed timber closeboard fence; 1800mm height; allow gaps to bottom for hedgehog movement; or similar approved
 - B2 Proposed timber bollard; 500mm height; 2000mm spacing; or similar approved
 - B3 Proposed mesh metal fencing; 1800mm height; with lockable security gates; or similar approved
 - G Proposed timber gates to match timber closeboard fence

Furniture & Features

- F1 Proposed timber seat; Buckingham Seat by Broxap; FSC treated timber; or similar approved
- F2 Proposed picnic set; H-Frame Picnic Table by Broxap; FSC treated timber; or similar approved
- F3 Proposed litter bin; Derby Standard Litter Bin by Broxap; or similar approved
- F4 Proposed dog waste bin; K-Nine Post Mounted Dog Waste Bin by Broxap; or similar approved
- F5 Proposed play trunk; hardwood species; free from major splits with all minor branches and sharp edges removed
- F6 Proposed glacial boulder by CED; buried to 1/3 depth; or similar proposed
- LP Proposed log pile; refer to ecologists' CEMP Ecological Enhancements for details

Soft Landscape - refer to Detailed Planting proposals for details

- Existing tree; refer to arboricultural report for details
- Proposed tree
- Proposed hedge
- Proposed planting
- Proposed grass
- Proposed meadow

DRAWING FOR PLANNING PURPOSES ONLY. DO NOT CONSTRUCT FROM THIS DRAWING

ALL DRAINAGE (INCLUDING LEVELS) TO ENGINEERS DETAILS


ALL LIGHTING TO BE DESIGNED BY SPECIALIST

ALL BUILDUPS AND RETAINING STRUCTURES TO ENGINEERS DETAILS

FOR OTHER LANDSCAPE DRAWINGS REFER TO THE FOLLOWING:

Detailed Planting Proposals
- 2775-LLA-ZZ-ZZ-DR-L-0200 drawing series

Landscape Specification and Details
- 2775-LLA-ZZ-ZZ-DR-L-0301

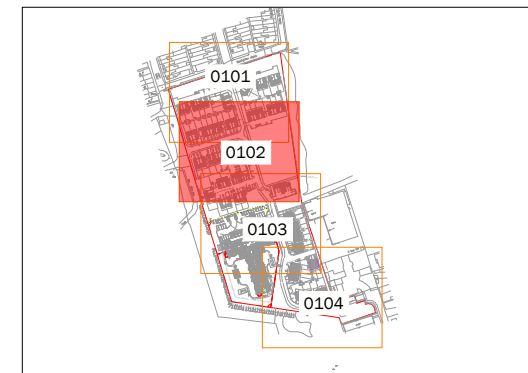

Location Plan - Not to Scale

0 1 2 5 10m
Scale in metres

P02	02.02.24	POS bollards removed, planting to 1300x430x2, BCPs coordinated	ML	AF
P01	30.01.24	First issue	JL	AF
Rev	Date	Description	Drn	Chk
Title: Detailed Hard Landscape Proposals				
Sheet 2 of 4				
Project: Boundary Road, Hythe				
Client: Roddy New Homes				
Date: January 2024				
Scale: 1:200 @ A1				
Drawing No: 2775-LLA-ZZ-ZZ-DR-L-0102				
Revision: P02				
Suitability: Planning				
Project No: 2775				